



RUGGED. RELIABLE. REAL.

ET16KX

FEATURES

- 4,000 LB Maximum Lifting Capacity
- 16,000 FT-LB Moment Rating
- Electric - Hydraulic Power
- Manual or Hydraulic Boom Extension 8-12 FT
- Manual Boom Extension 12-16 FT
- Continuous Power Rotation
- Meets ANSI B30.5 Safety Standards
- Meets OSHA 1910.180 Requirements

LIFTING CAPACITIES	
REACH (FT.)	CAPACITY (LBS.)
4	4,000
8	2,000
12	1,250
16	900

STANDARD EQUIPMENT


- Capacity Overload Shut-Off System
- Anti-Two-Blocking System
- 80 FT of 5/16" Aircraft-Quality Wire Rope
- Remote Control Pendant: 25 FT Cord and Quick Disconnect
- Load Block with Swivel Hook Safety Latch
- Master Disconnect Switch
- Battery Cable: 25 FT

MINIMUM REQUIREMENTS

- 10,500 LB GVWR Chassis
- Outriggers: Rear
- Electric Power Source: 12V DC

OPTIONAL EQUIPMENT

- Radio Remote Controls
- Electric/Hydraulic and Manual Outrigger Packages
- Mounting Pedestal for Platform Bodies
- Boom Rests

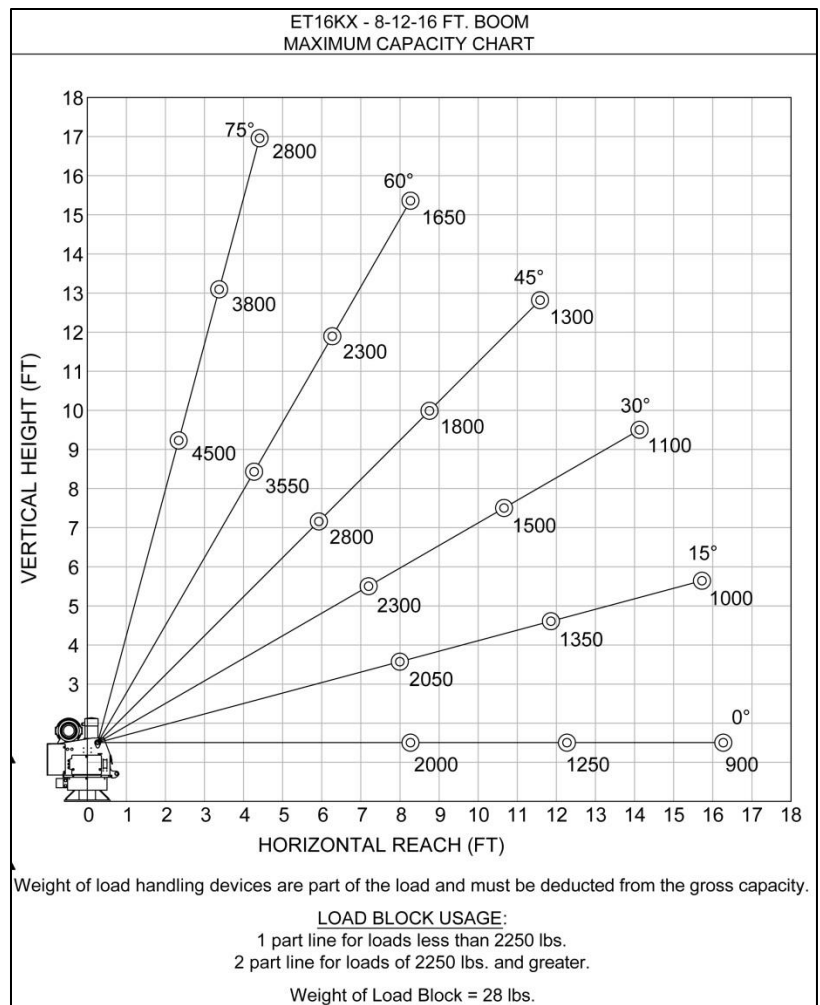

12110 Best Place | Cincinnati, Ohio 45241 | 800-226-2238 | 513-772-8446

info@venturo.com | www.venturo.com

