



HT50KX

FEATURES

- 8,000 LB Maximum Lifting Capacity
- 50,000 FT-LB Moment Rating
- Fully Hydraulic Power
- Hexagonal Boom Construction
- 400° Power Rotation
- Meets ANSI B30.5 Safety Standards
- Meets OSHA 1910.180 Requirements

HT50KX-P, Standard Feature Group

- Proportional control valve
- Pendant with Variable Speed Trigger Switch
- Fully hydraulic boom extension 10' – 20' FT
- High Speed Winch: 60 FT/min.
- Hydraulic Requirements: 12 GPM, 25 GAL Reservoir

HT50KX, Basic Feature Group

- Non-proportional valve control
- Pendant with pre-set speed toggle switches
- Single-stage Hydraulic Extension 10' – 16' FT
- Manual Boom Extension 16' – 20' FT
- Winch Speed: 18 FT/min.
- Hydraulic Requirements: 3 GPM, 10 GAL Reservoir

STANDARD EQUIPMENT

- Capacity Overload Shut-Off System
- Anti-Two-Blocking System
- 100 FT of 3/8" Aircraft-Quality Wire Rope
- Remote Control Pendant: 25 FT Cord and Quick Disconnect
- Load Block with Swivel Hook Safety Latch

MINIMUM REQUIREMENTS


- 20,500 LB GVWR Chassis
- Outriggers: Front and Rear
- PTO, Pump and Reservoir
- Hydraulic Requirements: 12 GPM, 25 GAL Reservoir

12110 Best Place | Cincinnati, Ohio 45241 | 800-226-2238 | 513-772-8446

info@venturo.com | www.venturo.com

LIFTING CAPACITIES

REACH (FT.)	CAPACITY (LBS.)
6	8,000
10	5,000
16	3,100
20	2,500

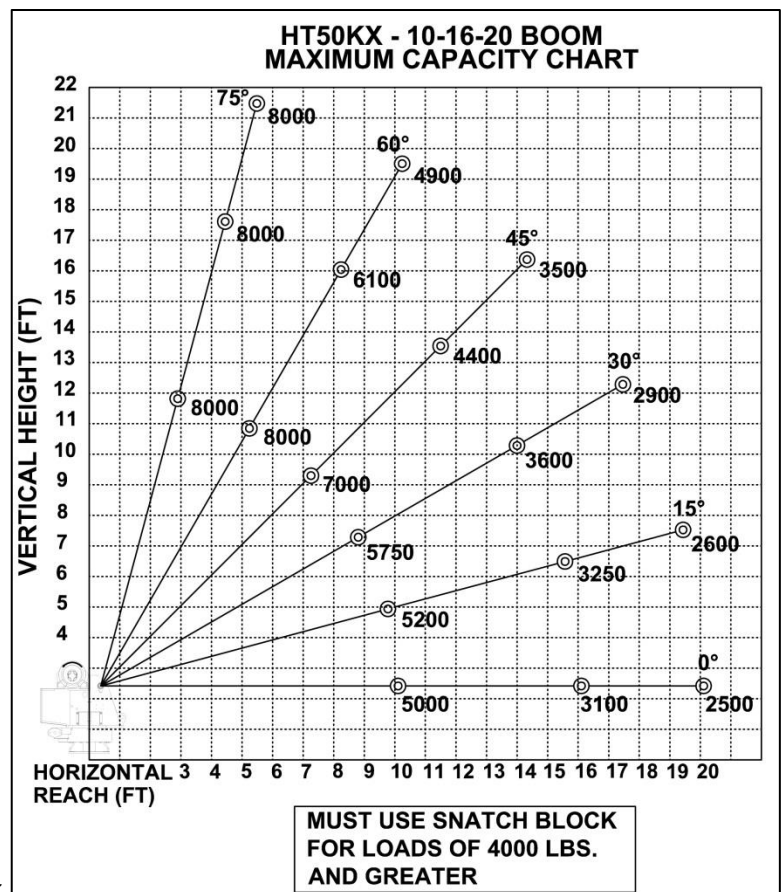

OPTIONAL EQUIPMENT

- Radio Remote Controls
- Hydraulic and Manual Outrigger Packages
- Hydraulic Pumps and Reservoirs
- Mounting Pedestal for Platform Bodies
- Boom Rests

